



DOME-02xx

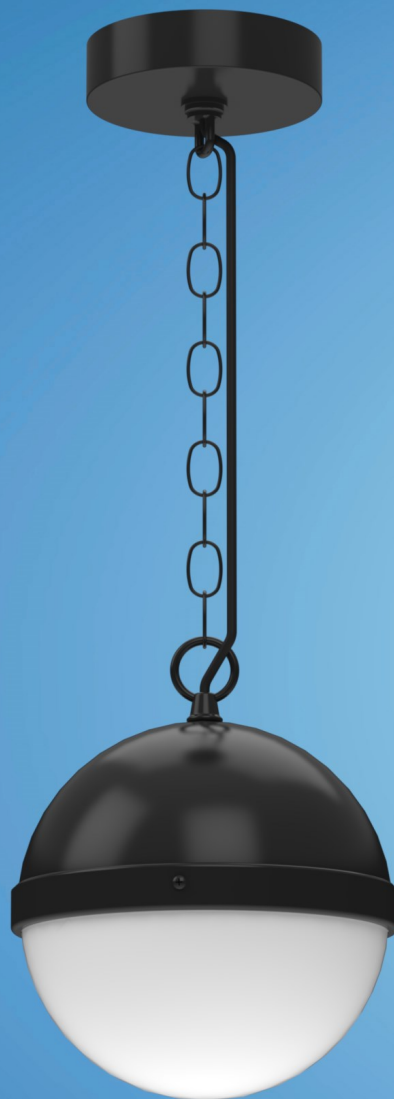

DOME-02xx

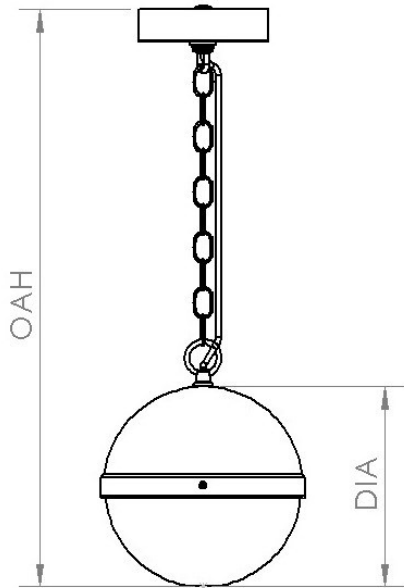

Specifications:

Description: Dome fixture with hand spun half ball top.

Material: Aluminum and acrylic.

Light Source: Integral LED and canopy housed driver.

Dimming: 0-10v, ELV and TRIAC dimming to 10% is standard.

Electrical: LED is 120-277v.

Suspension/Mounting: Canopy mounts to standard 4" octagonal J-box.

Options: Remote LED emergency driver. Remote driver box is 18" (L) x 6" (W) x 3" (H) for dry locations.

Modification: CONSULT FACTORY FOR MODIFICATION OF THIS PRODUCT.

Finish: Choose from a selection of standard powder coat finishes, metal finishes or specify custom finish.

Certification: ETL listed for indoor dry locations.



Ordering number:

--	--	--	--	--	--	--	--	--

Model	DIA	OAH	Mounting	Light Source	CCT	Finish	Acrylic	Options
DOME-0209	9"	16"-96"	ST - Stem CH - Chain WC - White Cord BC - Black Cord	10W - LED 1,200 Lumens	27 - 2700K / 30 - 3000K 35 - 3500K / 40 - 4000K	*See Below*	SW - Smooth White FW - Frosted White	ELR - Remote LED Emergency Driver
DOME-0214	14"	22"-96"	ST - Stem CH - Chain WC - White Cord BC - Black Cord	15W - LED 2,000 Lumens	27 - 2700K / 30 - 3000K 35 - 3500K / 40 - 4000K	*See Below*	SW - Smooth White FW - Frosted White	ELR - Remote LED Emergency Driver

Powder Coat Finishes			Metal Finishes		
GW - Gloss White	TB - Textured Black	GO - Gold	ORB - Oil Rubbed Bronze	PN - Polished Nickel	PB - Polished Brass
MW - Matte White	SR - Silver	GY - Gray	PA - Polished Aluminum	BN - Brushed Nickel	BB - Brushed Brass
GB - Gloss Black	BZ - Bronze	CC - Custom Color	BA - Brushed Aluminum	SN - Satin Nickel	SB - Satin Brass
MB - Matte Black			SA - Satin Aluminum		