


TUB-04xx



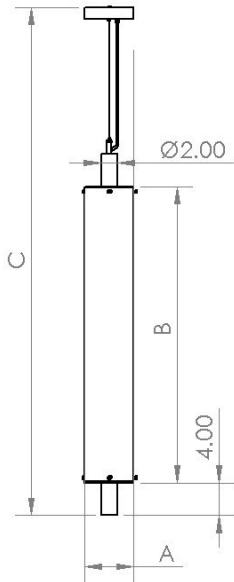

Specifications:

Description: Cylindrical acrylic pendant with decorative ends.

Material: Aluminum and acrylic.

Light Source: Integral LED and canopy housed driver.

Dimming: 0-10v, ELV and TRIAC dimming to 10% is standard.

Electrical: LED is 120-277v.

Suspension/Mounting: Cable/cord hung. Mounts to standard 4" octagonal J-box.

Options: Remote LED emergency driver. Remote driver box is 18" (L) x 6" (W) x 3" (H) for dry locations.

Modification: CONSULT FACTORY FOR MODIFICATION OF THIS PRODUCT.

Finish: Choose from a selection of standard powder coat finishes, metal finishes or specify custom finish.

Certification: ETL listed for indoor dry locations.

Powder Coat Finishes			Metal Finishes		
GW - Gloss White	TB - Textured Black	GO - Gold	ORB - Oil Rubbed Bronze	PN - Polished Nickel	PB - Polished Brass
MW - Matte White	SR - Silver	GY - Gray	PA - Polished Aluminum	BN - Brushed Nickel	BB - Brushed Brass
GB - Gloss Black	BZ - Bronze	CC - Custom Color	BA - Brushed Aluminum	SN - Satin Nickel	SB - Satin Brass
MB - Matte Black			SA - Satin Aluminum		

Ordering number:

--	--	--	--	--	--	--	--	--	--

Model	A	B	C	Mounting	Light Source	CCT	Finish	Acrylic	Options
TUB-0404	4"	24"	40"-120"	BCC - Black Cord & SS Cable WCC - White Cord & SS Cable	50W - LED 6,430 Lumens	27 - 2700K / 30 - 3000K 35 - 3500K / 40 - 4000K	*See Above*	SW - Smooth White FW - Frosted White FA - Faux Alabaster	ELR - Remote LED Emergency Driver
TUB-0404	4"	36"	52"-120"	BCC - Black Cord & SS Cable WCC - White Cord & SS Cable	60W - LED 8,045 Lumens	27 - 2700K / 30 - 3000K 35 - 3500K / 40 - 4000K	*See Above*	SW - Smooth White FW - Frosted White FA - Faux Alabaster	ELR - Remote LED Emergency Driver
TUB-0404	4"	48"	64"-120"	BCC - Black Cord & SS Cable WCC - White Cord & SS Cable	60W - LED 10,306 Lumens	27 - 2700K / 30 - 3000K 35 - 3500K / 40 - 4000K	*See Above*	SW - Smooth White FW - Frosted White FA - Faux Alabaster	ELR - Remote LED Emergency Driver

Model	A	B	C	Mounting	Light Source	CCT	Finish	Acrylic	Options
TUB-0406	6"	24"	40"-120"	BCC - Black Cord & SS Cable WCC - White Cord & SS Cable	50W - LED 6,430 Lumens	27 - 2700K / 30 - 3000K 35 - 3500K / 40 - 4000K	*See Page 2*	SW - Smooth White FW - Frosted White FA - Faux Alabaster	ELR - Remote LED Emergency Driver
TUB-0406	6"	36"	52"-120"	BCC - Black Cord & SS Cable WCC - White Cord & SS Cable	60W - LED 8,045 Lumens	27 - 2700K / 30 - 3000K 35 - 3500K / 40 - 4000K	*See Page 2*	SW - Smooth White FW - Frosted White FA - Faux Alabaster	ELR - Remote LED Emergency Driver
TUB-0406	6"	48"	64"-120"	BCC - Black Cord & SS Cable WCC - White Cord & SS Cable	60W - LED 10,306 Lumens	27 - 2700K / 30 - 3000K 35 - 3500K / 40 - 4000K	*See Page 2*	SW - Smooth White FW - Frosted White FA - Faux Alabaster	ELR - Remote LED Emergency Driver

Model	A	B	C	Mounting	Light Source	CCT	Finish	Acrylic	Options
TUB-0408	8"	24"	40"-120"	BCC - Black Cord & SS Cable WCC - White Cord & SS Cable	50W - LED 6,430 Lumens	27 - 2700K / 30 - 3000K 35 - 3500K / 40 - 4000K	*See Page 2*	SW - Smooth White FW - Frosted White FA - Faux Alabaster	ELR - Remote LED Emergency Driver
TUB-0408	8"	36"	52"-120"	BCC - Black Cord & SS Cable WCC - White Cord & SS Cable	60W - LED 8,045 Lumens	27 - 2700K / 30 - 3000K 35 - 3500K / 40 - 4000K	*See Page 2*	SW - Smooth White FW - Frosted White FA - Faux Alabaster	ELR - Remote LED Emergency Driver
TUB-0408	8"	48"	64"-120"	BCC - Black Cord & SS Cable WCC - White Cord & SS Cable	60W - LED 10,306 Lumens	27 - 2700K / 30 - 3000K 35 - 3500K / 40 - 4000K	*See Page 2*	SW - Smooth White FW - Frosted White FA - Faux Alabaster	ELR - Remote LED Emergency Driver

Model	A	B	C	Mounting	Light Source	CCT	Finish	Acrylic	Options
TUB-0410	10"	24"	40"-120"	BCC - Black Cord & SS Cable WCC - White Cord & SS Cable	50W - LED 6,430 Lumens	27 - 2700K / 30 - 3000K 35 - 3500K / 40 - 4000K	*See Page 2*	SW - Smooth White FW - Frosted White FA - Faux Alabaster	ELR - Remote LED Emergency Driver
TUB-0410	10"	36"	52"-120"	BCC - Black Cord & SS Cable WCC - White Cord & SS Cable	60W - LED 8,045 Lumens	27 - 2700K / 30 - 3000K 35 - 3500K / 40 - 4000K	*See Page 2*	SW - Smooth White FW - Frosted White FA - Faux Alabaster	ELR - Remote LED Emergency Driver
TUB-0410	10"	48"	64"-120"	BCC - Black Cord & SS Cable WCC - White Cord & SS Cable	60W - LED 10,306 Lumens	27 - 2700K / 30 - 3000K 35 - 3500K / 40 - 4000K	*See Page 2*	SW - Smooth White FW - Frosted White FA - Faux Alabaster	ELR - Remote LED Emergency Driver