


GLB-CLSTR-01



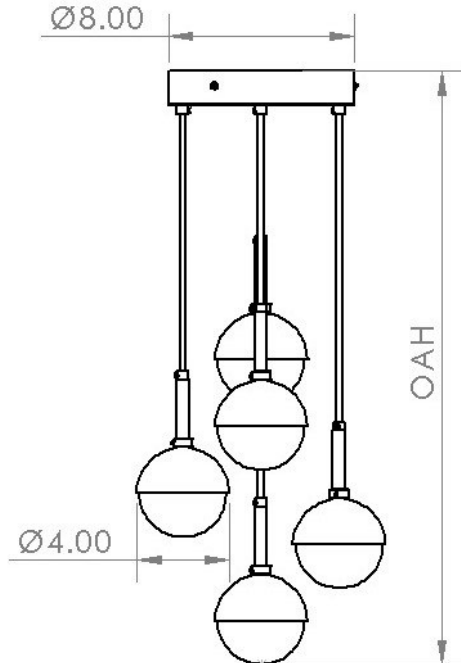

Specifications:

Description: Multi-globe pendant.

Material: Aluminum and glass

Light Source: Integral LED and canopy housed driver.

Dimming: 0-10v, ELV and TRIAC dimming to 10% is standard.

Electrical: LED is 120-277v.

Suspension/Mounting: Cord hung pendants. Canopy mounts to standard 4" octagonal J-box.

Options: Remote LED emergency driver. Remote driver box is 18" (L) x 6" (W) x 3" (H) for dry locations.

Modification: CONSULT FACTORY FOR MODIFICATION OF THIS PRODUCT.

Finish: Choose from a selection of standard powder coat finishes, metal finishes or specify custom finish.

Certification: ETL listed for indoor dry locations.

Ordering number:



--	--	--	--	--	--	--	--

Model	DIA	OAH	Mounting	Light Source	CCT	Finish	Glass	Options
GLB-CLSTR-01	8"	16" - 96"	BC - Black Cord WC - White Cord SC - Silver Cord	10W LED 500 lumens each globe	27 - 2700K / 30 - 3000K 35 - 3500K / 40 - 4000K	*See Below*	FW - Frosted White	ELR - Remote LED Emergency Driver

Powder Coat Finishes			Metal Finishes		
GW - Gloss White	TB - Textured Black	GO - Gold	ORB - Oil Rubbed Bronze	PN - Polished Nickel	PB - Polished Brass
MW - Matte White	SR - Silver	GY - Gray	PA - Polished Aluminum	BN - Brushed Nickel	BB - Brushed Brass
GB - Gloss Black	BZ - Bronze	CC - Custom Color	BA - Brushed Aluminum	SN - Satin Nickel	SB - Satin Brass
MB - Matte Black			SA - Satin Aluminum		