

RLM-4100



Specifications:

Description: Arm mounted RLM shade.

Material: Aluminum.

Light Source: Sealed LED with J-box mounted LED driver or sealed jelly jar with integral LED and LED driver.

Dimming: 0-10v, ELV and TRIAC dimming to 10% is standard.

Electrical: LED is 120-277v.

Arms: Two different arm options. Custom arms available. Consult factory for options.


Suspension/Mounting: Mounts to standard 4" octagonal J-box.

Options: Remote LED emergency driver. Remote driver box is 18" (L) x 6" (W) x 3" (H) for dry locations.

Modification: CONSULT FACTORY FOR MODIFICATION OF THIS PRODUCT.

Finish: Choose from a selection of standard powder coat finishes, metal finishes or specify custom finish.

Certification: ETL listed for indoor dry or outdoor wet locations.

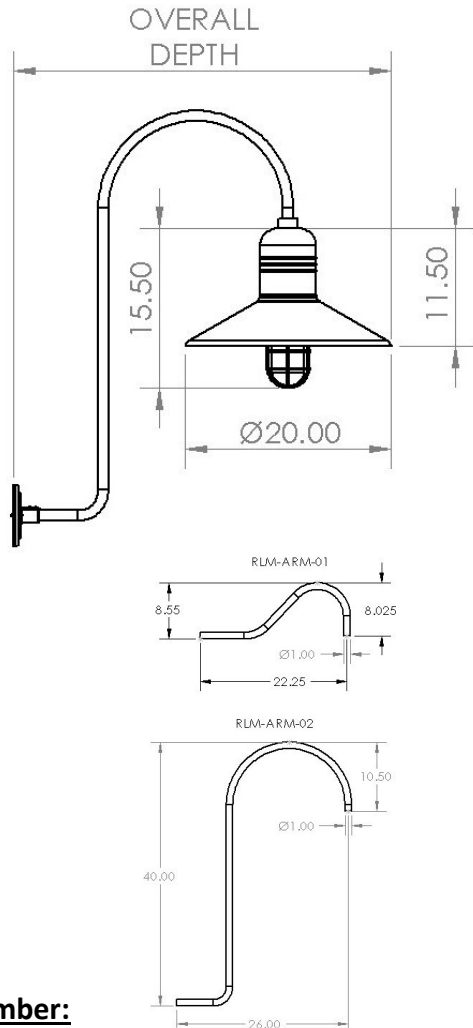

Ordering number:



Model	DIA	H	Light Source	CCT	Arm	Finish	Options
RLM-4100	12"	6"	50W - LED - 7,000 Lumens 26W - LED - 3,000 Lumens (jelly jar)	27 - 2700K / 30 - 3000K 35 - 3500K / 40 - 4000K	01 - RLM-ARM-01 02 - RLM-ARM-02	*See Below*	ELR - Remote LED Emergency Driver

Powder Coat Finishes			Metal Finishes		
GW - Gloss White	TB - Textured Black	GO - Gold	ORB - Oil Rubbed Bronze	PN - Polished Nickel	PB - Polished Brass
MW - Matte White	SR - Silver	GY - Gray	PA - Polished Aluminum	BN - Brushed Nickel	BB - Brushed Brass
GB - Gloss Black	BZ - Bronze	CC - Custom Color	BA - Brushed Aluminum	SN - Satin Nickel	SB - Satin Brass
MB - Matte Black			SA - Satin Aluminum		