


**DRM-04xx**




## Available Patterns




ROUND




SLOTTED



SQUARE



HEXAGONAL

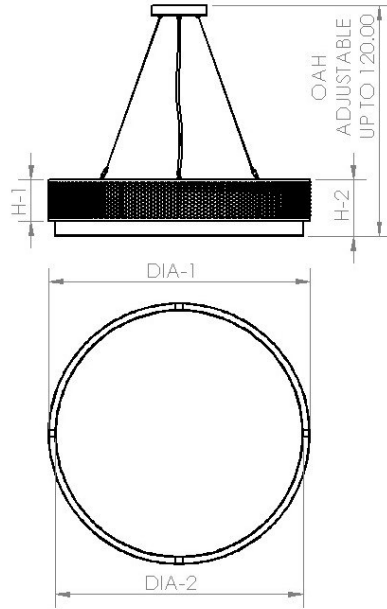

## Specifications:

**Description:** Acrylic drum fixture with decorative perforated metal ring.

**Material:** Aluminum and acrylic.

**Light Source:** Integral LED and canopy housed driver.

**Dimming:** 0-10v, ELV and TRIAC dimming to 10% is standard.

**Electrical:** LED is 120-277v.

**Suspension/Mounting:** Cable/cord hung. Canopy mounts to standard 4" octagonal J-box.

**Options:** Remote LED emergency driver. Remote driver box is 18" (L) x 6" (W) x 3" (H) for dry locations.

**Modification:** CONSULT FACTORY FOR MODIFICATION OF THIS PRODUCT.

**Finish:** Choose from a selection of standard powder coat

**Certification:** ETL listed for indoor dry locations.



## Ordering number:

| Model    | DIA-1 | DIA-2 | H-1 | H-2 | OAH     | Mounting                                                   | Light Source              | CCT                                                | Finish      | Acrylic                                 | Options                           |
|----------|-------|-------|-----|-----|---------|------------------------------------------------------------|---------------------------|----------------------------------------------------|-------------|-----------------------------------------|-----------------------------------|
| DRM-0412 | 14"   | 12"   | 6"  | 8"  | 20"-96" | BCC - Black Cord & SS Cable<br>WCC - White Cord & SS Cable | 20W - LED<br>2,875 Lumens | 27 - 2700K / 30 - 3000K<br>35 - 3500K / 40 - 4000K | *See Below* | SW - Smooth White<br>FW - Frosted White | ELR - Remote LED Emergency Driver |
| DRM-0418 | 20"   | 18"   | 6"  | 8"  | 20"-96" | BCC - Black Cord & SS Cable<br>WCC - White Cord & SS Cable | 25W - LED<br>3,600 Lumens | 27 - 2700K / 30 - 3000K<br>35 - 3500K / 40 - 4000K | *See Below* | SW - Smooth White<br>FW - Frosted White | ELR - Remote LED Emergency Driver |
| DRM-0424 | 26"   | 24"   | 6"  | 8"  | 20"-96" | BCC - Black Cord & SS Cable<br>WCC - White Cord & SS Cable | 30W - LED<br>4,675 Lumens | 27 - 2700K / 30 - 3000K<br>35 - 3500K / 40 - 4000K | *See Below* | SW - Smooth White<br>FW - Frosted White | ELR - Remote LED Emergency Driver |
| DRM-0430 | 32"   | 30"   | 6"  | 8"  | 20"-96" | BCC - Black Cord & SS Cable<br>WCC - White Cord & SS Cable | 35W - LED<br>5,275 Lumens | 27 - 2700K / 30 - 3000K<br>35 - 3500K / 40 - 4000K | *See Below* | SW - Smooth White<br>FW - Frosted White | ELR - Remote LED Emergency Driver |
| DRM-0436 | 38"   | 36"   | 6"  | 8"  | 20"-96" | BCC - Black Cord & SS Cable<br>WCC - White Cord & SS Cable | 40W - LED<br>6,300 Lumens | 27 - 2700K / 30 - 3000K<br>35 - 3500K / 40 - 4000K | *See Below* | SW - Smooth White<br>FW - Frosted White | ELR - Remote LED Emergency Driver |

| Powder Coat Finishes |                     |                   | Metal Finishes          |                      |                     |
|----------------------|---------------------|-------------------|-------------------------|----------------------|---------------------|
| GW - Gloss White     | TB - Textured Black | GO - Gold         | ORB - Oil Rubbed Bronze | PN - Polished Nickel | PB - Polished Brass |
| MW - Matte White     | SR - Silver         | GY - Gray         | PA - Polished Aluminum  | BN - Brushed Nickel  | BB - Brushed Brass  |
| GB - Gloss Black     | BZ - Bronze         | CC - Custom Color | BA - Brushed Aluminum   | SN - Satin Nickel    | SB - Satin Brass    |
| MB - Matte Black     |                     |                   | SA - Satin Aluminum     |                      |                     |